


# Niro-Ringschrauben

DIN 580, Ausführung A2 und A4

Nenngröße	Traglast	Abmessungen					Gewicht	Preis pro Stück		
		d2	d3	d4	h	L			A2	A4
d1										
Ø mm	kg	mm	mm	mm	mm	mm	kg	VPN	Euro	Euro
M 6	70	20	36	20	49,0	13,0	0,06	50	4,20	5,50
M 8	140	20	36	20	49,0	13,0	0,06	50	4,20	5,50
M 10	230	25	45	25	62,0	17,0	0,11	25	6,30	9,30
M 12	340	30	54	30	73,5	20,5	0,18	25	10,10	15,50
M 16	700	35	63	35	89,0	27,0	0,28	25	15,90	24,70
M 20	1.200	40	72	40	101,0	30,0	0,45	10	25,60	34,40
M 24	1.800	50	90	50	126,0	36,0	0,74	10	49,00	72,00
M 30	3.600	65	108	60	153,0	45,0	1,66	-	a.A.	a.A.

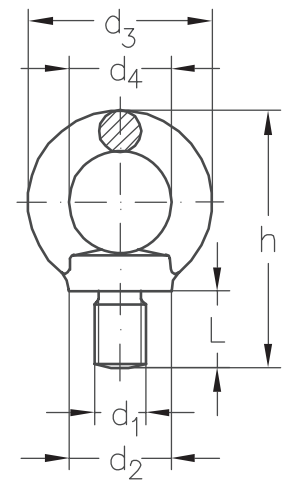

# Niro-Ringmutter

DIN 582, Ausführung A2 und A4

Nenngröße	Traglast	Abmessungen				Gewicht	Preis pro Stück		
		d2	d3	d4	h			A2	A4
d1									
Ø mm	kg	mm	mm	mm	mm	kg	VPN	Euro	Euro
M 6	70	20	36	20	36	0,05	50	4,20	5,50
M 8	140	20	36	20	36	0,05	50	4,20	5,50
M 10	230	25	45	25	45	0,09	25	7,15	9,30
M 12	340	30	54	30	53	0,16	25	11,45	15,50
M 16	700	35	63	35	62	0,24	25	18,50	21,80
M 20	1.200	40	72	40	71	0,36	10	28,40	34,40
M 24	1.800	50	90	50	90	0,72	10	54,50	72,00
M 30	3.600	65	108	60	109	1,32	-	a.A.	a.A.

