

# Traglasttabelle

für Rundschlingengehänge, nach EN 1492-2

Rundschlinge	1-strang	2-strang		3-strang		4-strang	
	einfach direkt	β		β		β	
		0° - 45°	45° - 60°	0° - 45°	45° - 60°	0° - 45°	45° - 60°
							
Faktor	1,0	1,4	1,0	2,1	1,5	2,1	1,5
<b>Traglast WLL in kg</b>							
 1.000	1.000	1.400	1.000	2.100	1.500	2.100	1.500
 2.000	2.000	2.800	2.000	4.200	3.000	4.200	3.000
 3.000	3.000	4.200	3.000	6.300	4.500	6.300	4.500
 5.000	5.000	7.000	5.000	10.500	7.500	10.500	7.500
 8.000	8.000	11.200	8.000	16.800	12.000	16.800	12.000

## RSG Rundschlingengehänge


### 1-strängig

#### Ausstattung und Verarbeitung

- aus Polyester (PES) nach EN 1492-2 mit hochfesten Beschlagteilen nach EN 1677
- Standardlängen 1,00 - 3,00 m L1
- Achtung: Die Längenangaben beziehen sich auf die Nutzlänge L1

#### Hinweis

andere Traglasten und Nutzlängen L1 auf Anfrage lieferbar  
Hebebandgehänge auf Anfrage

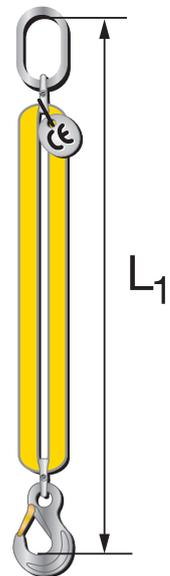

Modell	Traglast WLL	Preis pro Stück / Nutzlänge L1				
		1,00 m	1,50 m	2,00 m	2,50 m	3,00 m
	kg	Euro	Euro	Euro	Euro	Euro
 RSG1-01000×XXXX	1.000	136,10	141,70	147,30	152,90	158,50
 RSG1-02000×XXXX	2.000	153,80	160,40	167,10	173,70	180,40
 RSG1-03000×XXXX	3.000	199,10	207,90	216,60	225,40	234,10
 RSG1-05000×XXXX	5.000	322,00	335,00	348,00	360,90	373,90
 RSG1-08000×XXXX	8.000	559,20	579,30	599,40	619,50	639,60

XXXX... Nutzlänge in mm; z.B. 1,0 m -> RSG1-3000x1000; andere Längen und Traglasten auf Anfrage